

30V Input Standoff, 1A Fully Integrated Linear Charger for 1 Cell Li-ion Battery

DESCRIPTION

ETA4049 is a single cell, fully integrated constant current (CC)/constant voltage (CV) Li-ion battery charger. Its compact package with minimum external components requirement makes the ETA4049 ideal for portable applications. No external sense resistor or blocking diode is necessary for the ETA4049. Build-in thermal feedback mechanism regulates the charge current to control the die temperature during high power operation or at elevated ambient temperature. The ETA4049 has the function of pre-charge, which can charge the deeply discharged batteries by trickle. The fast charge current can be programmed by an external resistor. CV regulation mode is automatically enabled once the battery's charging curve reaches the constant voltage portion. The output current then decays and is finally terminated once the charge current drops to the current threshold set by RIBF. The ETA4049 keeps monitoring the battery voltage and enables a new charge cycle once the voltage drops by 200mV below the CV value. ETA4049 is in a DFN3x3-10 package.


FEATURES

- ◆ 30V Input Standoff Voltage
- ◆ 4.2V Charge Termination Voltage
- ◆ 2.6V Trickle Charge Threshold
- ◆ Input Over Voltage Protection
- ◆ Charge Current Programmable, up to 1A
- ◆ 400nA BAT Current when No Charging
- ◆ Soft-start Limits in-rush Current
- ◆ DFN3x3-10 Package
- ◆ RoHS Compliant

APPLICATIONS

- ◆ E-cigarette
- ◆ Toys
- ◆ Bluetooth Applications
- ◆ Li-ion Battery Powered Devices


TYPICAL APPLICATION

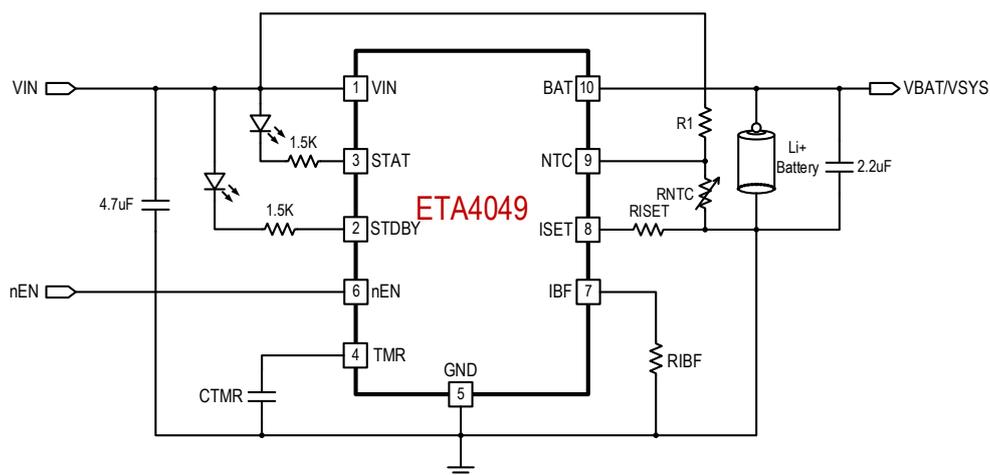

ORDERING INFORMATION

PART No.	PACKAGE	TOP MARK	Pcs/Reel
ETA4049D3K	DFN3x3-10	ETA4049 YWW2L	5000

PIN CONFIGURATION

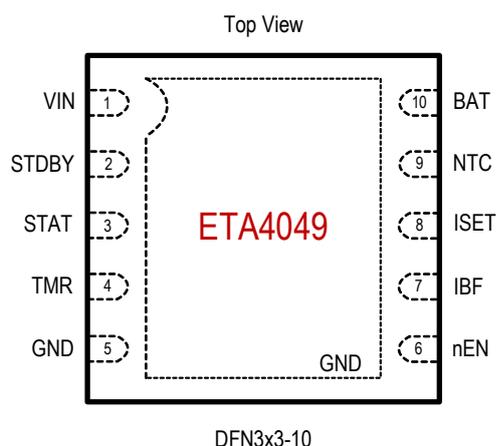

ABSOLUTE MAXIMUM RATINGS

(Note: Exceeding these limits may damage the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.)

VIN Voltage	-0.3V to 30V
ISET, IBF, TMR Voltage	-0.3V to 6V
All other pin Voltage.....	-0.3V to 16V
Operating Temperature Range.....	-40°C to 85°C
Storage Temperature Range	-55°C to 150°C
Thermal Resistance θ_{JC} θ_{JA}	
DFN3x3-10	12.....50..... °C/W
Lead Temperature (Soldering, 10sec)	260°C
ESD HBM (Human Body Mode).....	2KV
ESD CDM (Charged Device Mode).....	1KV

ELECTRICAL CHARACTERISTICS

($V_{IN} = 5V$, unless otherwise specified. Typical values are at $T_A = 25^\circ C$.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Standoff Voltage		30			V
Input Over-Voltage Protection Voltage	VIN Rising, Hys=0.4V	6.8	7	7.3	V
Input Voltage Range for Charging		4.25		6	V
Input Supply Current	Charge Mode		800	2000	μA
	Standby Mode (Charge Terminated)		180	360	μA
	Shutdown Mode (ISET not Connected, VIN<VBAT, or VIN<VULO)		45	90	μA
Regulated Output (Float) Voltage	Rset = 10K, IBAT = 40mA	4.16	4.2	4.24	V
BAT Pin Current	Rset = 3.6K, Current Mode, VBAT=3.8V	450	500	550	mA
	Rset = 1.6K to 8K, Current Mode	90	100	110	%ICHRG
	Standby Mode, VBAT = 4.2V		6	8	μA
	Shutdown Mode, ISET not Connected	0	0.4	0.7	μA
	Sleep Mode, VIN = 0V	0	0.4	0.7	μA
Trickle Charge Current	VBAT < VTRICKLE	8	10	12	%ICHRG
Trickle Charge Threshold Voltage	VBAT Rising	2.45	2.60	2.75	V
Trickle Charge Hysteresis Voltage			100		mV
VIN Under-voltage Lockout Threshold	From VIN Low to High	3.3	3.6	3.9	V
VIN Under-voltage Lockout Hysteresis		0.4	0.55	0.65	V
VIN-VBAT Lockout Threshold Voltage	VIN from Low to High	70	150	230	mV
	VIN from High to Low	20	70	130	


PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Termination Current Threshold		1.7V/RIBF(KΩ)			A
ISET Pin Voltage	Current Mode, VBAT=4V	1.35	1.5	1.65	V
STAT/STDBY Pin Weak Pull-Down Current	V_STAT = 5V	0.1			μA
STAT/STDBY Pin Output Low Voltage	I_STAT or I_STDBY= 5mA	0.7 1.4			V
Recharge BAT Threshold Voltage	VBAT Falling	100	200	300	mV
Junction Temperature in Constant Temperature Mode		110			°C
Power FET "ON" Resistance (Between VIN and BAT)		0.6			Ω
ISET Pin Pull-Up Current		1			μA
Enable Charger	nEN Pin Falling	0.6			V
Disable Charger	nEN Pin Rising	1.6			V
NTC Threshold, Cold	Charger Suspended	43			%VIN
NTC Threshold, Hot	Charger Suspended	6			%VIN
NTC Threshold Hysteresis		2			%VIN
NTC Disable Threshold	Tie NTC to GND	0.1			V
NTC Input Leakage		0 1			μA
Oscillation Frequency	CTMR=1uF	15			Hz

PIN DESCRIPTION

PIN#	NAME	DESCRIPTION
1	VIN	Positive input supply. Needs to be bypassed with at least a 4.7μF capacitor.
2	STDBY	Open-Drain output for charge finished flag. The STDBY pin outputs low when the battery is finished charging. When in the status of charging, it becomes high-impedence.
3	STAT	Open-Drain output for in charging flag. The STAT pin outputs low when the battery is in charging. Upon the completion of the charge cycle, it becomes high-impedence.
4	TMR	Oscillator Period Timer. Connect a timing capacitor between this pin and GND to set the oscillator period.
5/ Exposed Pad	GND	Ground
6	nEN	Enable the IC charger or not. Drive this pin low or floating to enable charger, high to disable.
7	IBF	Charge status threshold program. Connect this pin to an external resistor to program the charge termination current or battery full charge current.

PIN#	NAME	DESCRIPTION
8	ISET	<p>Charge current setting. Program, Monitor the charge current and Shutdown. This pin set to 1.5V in constant-current mode. The charge current can be calculated using the following formula:</p> $I_{BAT}(mA) = \frac{1}{R_{set}(k\Omega)} \times 1800$ <p>The ISET pin can also be used to switch the charger to shutdown mode by disconnecting the program resistor from ground.</p>
9	NTC	<p>Negative Thermal Coefficient (NTC) thermistor pin. Connect a 500KΩ resistor from this pin to VIN pin and a 100KΩ NTC resistor (within the battery pack) from this pin to ground. If NTC function is not used, replace NTC resistor with a regular 100KΩ resistor from this pin to ground. Do not leave this pin floating.</p>
10	BAT	<p>Charge current output. This pin provides charge current to the battery and regulates the final float voltage to 4.2V which is set by an internal precision resistor divider.</p>

FUNCTION BLOCK DIAGRAM

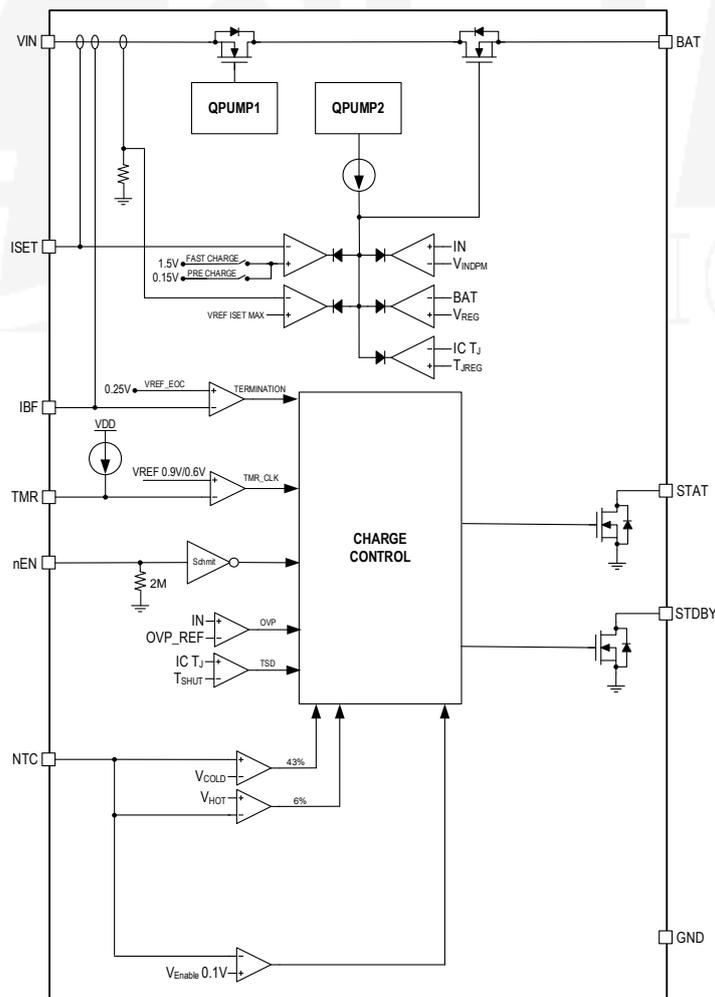

FUNCTIONAL DESCRIPTIONS

The ETA4049 is a single cell, fully integrated constant current (CC)/constant voltage (CV) Li-ion battery charger. It can deliver up to 1000mA of charge current with a final float voltage accuracy of 1%. The ETA4049 has a build-in thermal regulation circuitry that ensures its safe operation. No blocking diode or external current sense resistor is required. The ETA4049 is also capable of operating from a USB power source.

Normal Charge Cycle

The ETA4049 initiates a charge cycle once the voltage at the VIN pin rises above the UVLO threshold level. A 1% precision resistor needs to be connected from the ISET pin to ground. If the voltage at the BAT pin is less than 2.6V, the charger enters trickle charge mode. In this mode, the charge current is reduced to nearly 1/10 the programmed value until the battery voltage is raised to a safe level for full current charging.

The charger switches to constant-current mode as the BAT pin voltage rises above 2.6V, the charge current is thus resumed to full programmed value. When the final float voltage (4.2V) is reached, the ETA4049 enters constant-voltage mode and the charge current begins to decrease until it drops to the current threshold set by RIBF, $IBF=1.7V/RIBF$ and ends the charge cycle.

Programming Charge Current

The charge current is programmable by setting the value of a precision resistor connected from the ISET pin to ground. The charge current is 1800 times of the current out of the ISET pin. The charge current out of the BAT pin can be determined at any time by monitoring the ISET pin voltage using the following equation:

$$I_{BAT}(mA) = \frac{1}{R_{set}(k\Omega)} \times 1800$$

Charge Termination

The ETA4049 keeps monitoring the ISET pin during the charging process. It terminates the charge cycle when the charge current falls to the current threshold set by RIBF, $IBF=1.7V/RIBF$ after the final float voltage is reached. When the ISET pin voltage falls below 200mV for longer than tTERM (typically 1ms), charging is terminated. The charge current is latched off and the ETA4049 enters standby mode, where the input supply current drops to 180μA. (Note: termination is disabled in trickle charging and thermal limiting modes).

During charging, the transient response of the circuit can cause the ISET pin to fall below 200mV temporarily before the battery is fully charged, thus can cause a premature termination of the charge cycle. A 1ms filter time on the termination comparator can prevent this from happening. Once the average charge current drops below the current threshold set by RIBF, $IBF=1.7V/RIBF$, the ETA4049 terminates the charge cycle and ceases to provide any current through the BAT pin. In this state, all loads on the BAT pin must be supplied by the battery.

The ETA4049 constantly monitors the BAT pin voltage in standby mode and resume another charge cycle if this voltage drops below the recharge threshold. User can also manually restart a charge cycle in standby mode either by removing and then reapplied the input voltage or restart the charger using the ISET pin.

Charge Status Indicator (STAT and STDBY pin)

There are 2 different states of the charge status, one is IN CHRGING, and the other is CHARGING FINISHED. STAT pin is to pull low during IN CHARGING status and become high impedance in CHARGING FINISHED status. STDBY pin just works the opposite way, pulling low after charge finished, and high impedance when in charging.

High Temperature Fold-back

Build-in feedback circuitry mechanism can reduce the value of the programmed charge current once the die temperature tends to rise above 50°C, hence prevents the temperature from further increase and ensure device safe operation.

Under-voltage Lockout (UVLO)

Build-in under-voltage lockout circuit monitors the input voltage and keeps the charger in shutdown mode until VIN rises above the under-voltage lockout threshold. The UVLO circuit has a built-in hysteresis of 500mV. Furthermore, to protect against reverse current in the power MOSFET, the UVLO circuit keeps the charger in shutdown mode if VIN falls to within 70mV of the battery voltage. If the UVLO comparator is tripped, the charger will not come out of shutdown mode until VIN rises 150mV above the battery voltage.

Manual Shutdown

There are two methods can disable the IC charger:

1. Drive the EN pin to high.
2. Floating the ISET pin by removing the resistor from ISET pin to ground can put the device in shutdown mode. The battery drain current is thus reduced to <5μA and the supply current to <50μA. Reconnecting the resistor back will restart a new charge cycle.

Automatic Recharge

After the termination of the charge cycle, the ETA4049 constantly monitors the BAT pin voltage and starts a new charge cycle when the battery voltage falls below 4V, keeping the battery at fully charged condition. ISET pin output enters a strong pull-down state during recharge cycles.

Battery Temperature Monitoring


ETA4049 continuously monitors temperature by measuring the voltage of NTC pin. A negative or positive temperature coefficient thermistor and an external voltage divider typically develop this voltage. ETA4049 compares this voltage against its internal 43%VIN and 6%VIN thresholds to determine if charging is allowed. The temperature sensing circuit is immune to any fluctuation in VIN, since both the external voltage divider and the internal thresholds 43%VIN and 6%VIN are referenced to VIN. If the NTC pin is connected to GND will disable the temperature-sensing feature.

Timer Operation

The TMR pin is used to set the internal oscillator frequency, $F_{OSC} = 15\text{Hz} \times \frac{1\mu\text{F}}{C_{TMR}}$


The on-chip timer will start to count down after initial power-up or every time it is enabled. This timer will limit the max trickle-charge time to 32768 internal oscillating cycles. If the charger stays in trickle mode for longer than 32768 cycles, it will be terminated and a fault state will be set to STAT pin. After fault reporting, the charger can be re-initiated only by recycling the power supply or nEN signal. If the charger successfully goes through trickle charge within the allowed time limit, it will start CC charging and then CV charging. If the total charge time exceeds 262144 cycles and the battery full has not been qualified, the charger will be terminated and a fault will also be set by flashing STAT pin at the rate of half the internal oscillation frequency. This function prevents charging a dead battery for prolonged duration. The timer function can be disabled by shorting TMR to ground.

PCB GUIDELINES

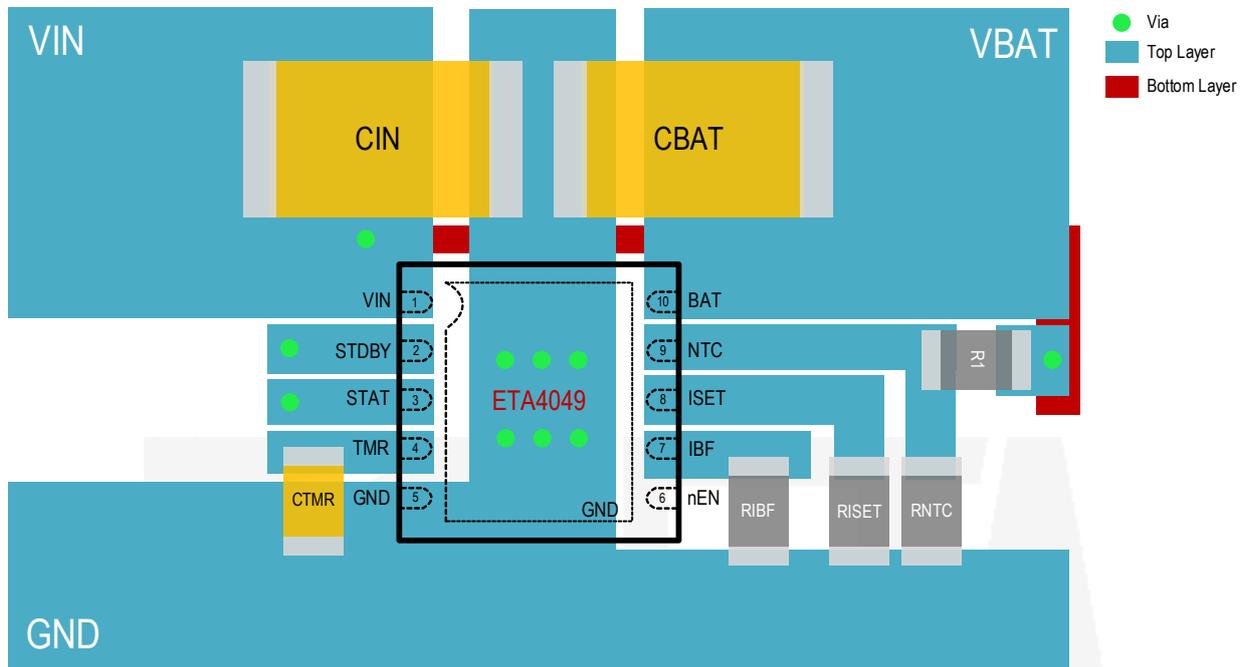


PACKAGE OUTLINE

Package: DFN3x3-10

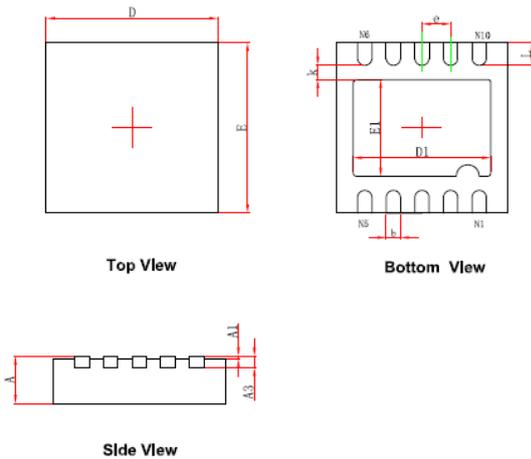

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min.	Max.	Min.	Max.
A	0.700/0.800	0.800/0.900	0.028/0.031	0.031/0.035
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	2.924	3.076	0.115	0.121
E	2.924	3.076	0.115	0.121
D1	2.300	2.500	0.091	0.098
E1	1.600	1.800	0.063	0.071
k	0.200MIN.		0.008MIN.	
b	0.200	0.300	0.008	0.012
e	0.500TYP.		0.020TYP.	
L	0.324	0.476	0.013	0.019

TAPE AND REEL INFORMATION

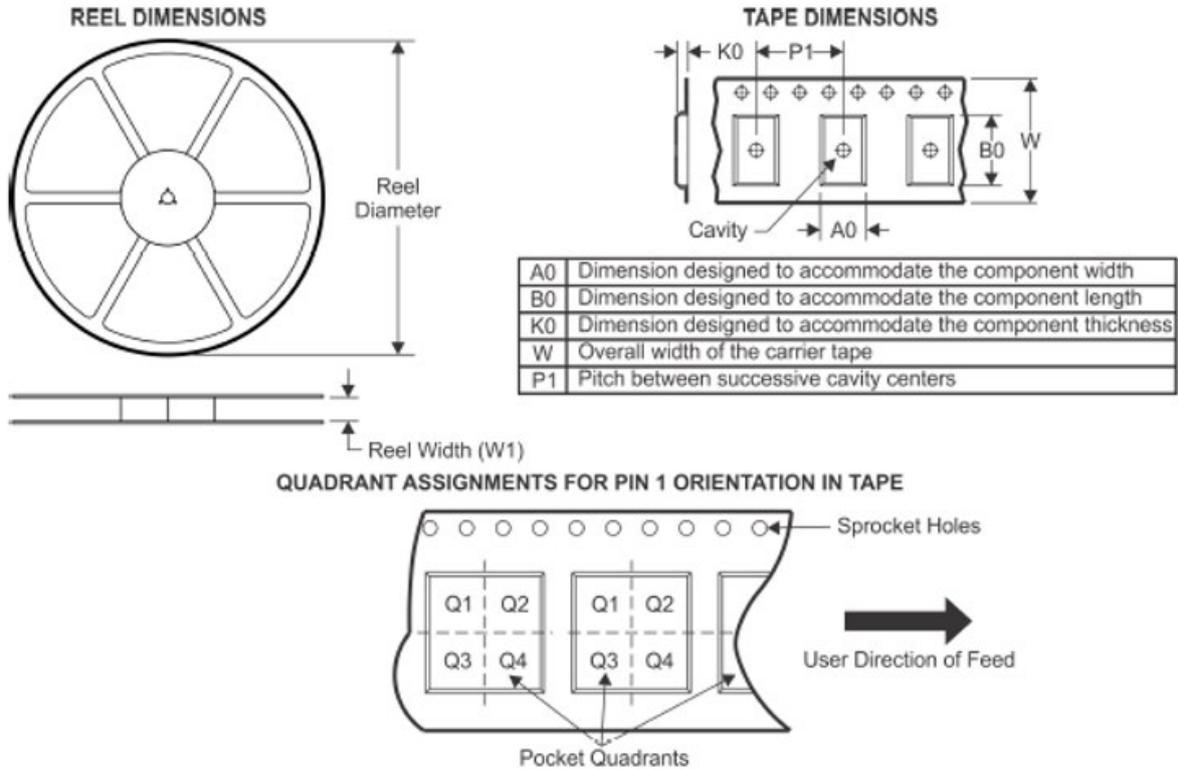

Device	Package Type	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ETA4049D3K	DFN3x3-10	10	5000	330	12.4	3.35	3.35	1.13	8	12	Q1